


# G1/4, 5/2 SOLENOID PILOT OPERATED SPRING RETURN VALVE

# ZNIV521000



## TECHNICAL SPECIFICATIONS

Medium : Compressed air  
 Operating pressure : 1.5 - 8 bar  
 Operating temperature : + 50°C  
 Flow Cv : 0.89



## ELECTRICAL

Coil Voltage 000 : 220V AC ; 50-60Hz (Code : 137)  
 : 110V AC ; 50-60Hz (Code : 131)  
 : 24V DC (Code : 10)  
 Insulation : Class 'F'  
 Protection Class : IP 65  
 Terminal Box : 3 Pin plug to IP 65  
 Power consumption : AC 3.5VA  
 : DC 2.5W

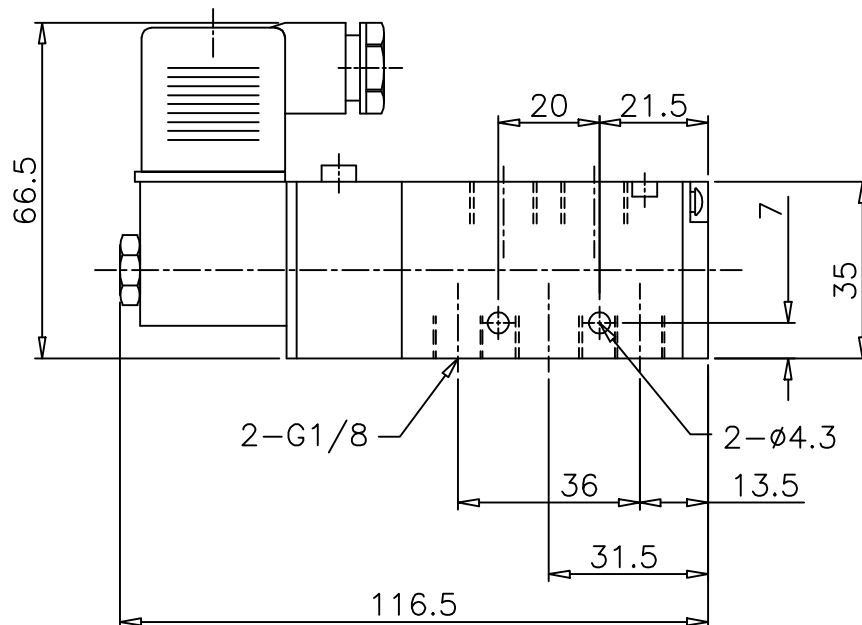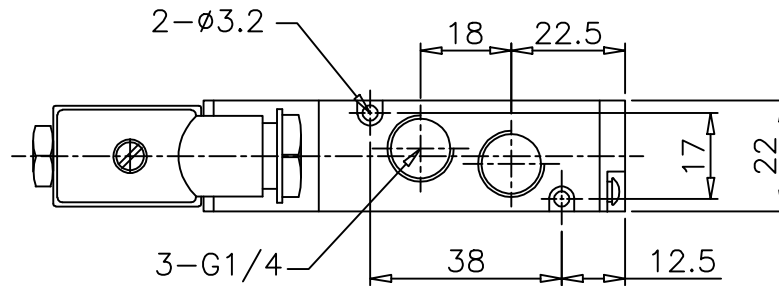

ALL DIMENSIONS ARE IN mm

NUCON INDUSTRIES PRIVATE LIMITED  
 88, C.I.E , BALANAGAR ,  
 HYDERABAD - 500 037

DRAWN	T.Prabhakar	07.05.2009
CHECKED		
APPROVED		